



## FEATURES



- Proprietary durable phosphor coating, for uniform solid appearance
- Multi-function PWM drivers, fully waterproof, featuring low power, high power, and turn signal modes
- Extremely bright, high-density LEDs that are visible even in direct sunlight
- Integrated mounting tabs for easy installation

## GENERAL SPECIFICATIONS

Product Function	Voltage Range	Current Draw*	Wattage	CCT/ Wavelength**	Lumen Output
Low	9-16V	120 mA	1.6W	1900K	95 lm
High	9-16V	500 mA	6.8W	1900K	420 lm
Turn	9-16V	1,050 mA	13.8W	1900K	840 lm

\*Current Draw @13.2v    \*\*+/-500 Tolerance

**Functions:** Low Amber, High Amber, and Turn Signal Amber outputs

**Driver Type:** Type H High Priority Driver

**Connector Type:** 2 Pin JST and 4 Pin JST with T-Tap

**LED Type/Count:** 3014 Amber LED/ 160 Total

**Operating Temperature:** -40°C to 85°C

**Length:** 9" **Width:** 5.75" **Height:** 2.25"

**Weight:** 1lbs



### What's Included:

- Two (2) LED halo rings
- Two (2) waterproof drivers
- Two (2) input wire pigtails
- Eight (8) T-tap connectors
- Installation guide


*All data and specifications are nominal values and may vary.*

**PUBLISHED: 4-17-2020**

COLORIMETRIC SPECIFICATIONS

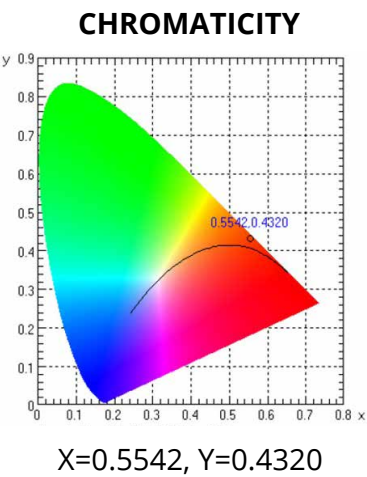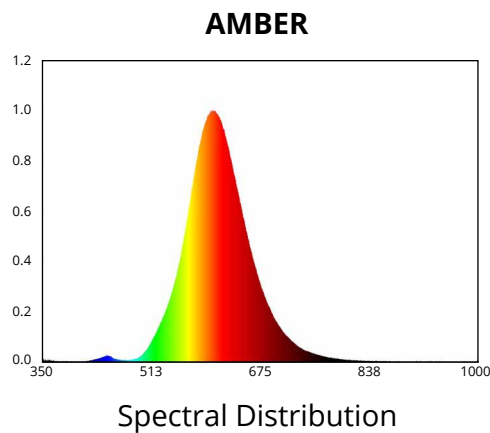

PRODUCT DIMENSIONS

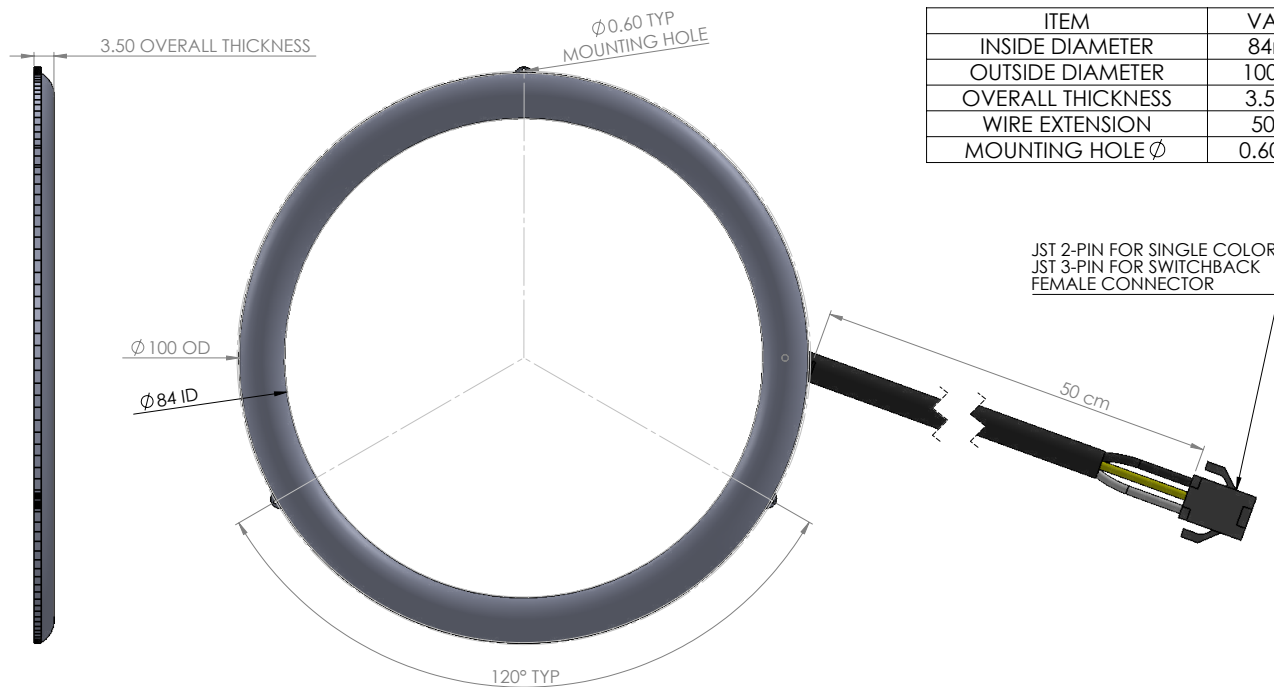

ITEM	VALUE
INSIDE DIAMETER	84mm
OUTSIDE DIAMETER	100mm
OVERALL THICKNESS	3.5mm
WIRE EXTENSION	50cm
MOUNTING HOLE $\phi$	0.60mm

PUBLISHED: 4-17-2020