

## FEATURES



- Proprietary durable phosphor coating, for uniform solid appearance
- Multi-function PWM drivers, fully waterproof, featuring low power, high power, and turn signal modes
- Extremely bright, high-density LEDs that are visible even in direct sunlight
- Integrated mounting tabs for easy installation

## GENERAL SPECIFICATIONS

| Product Function | Voltage Range | Current Draw* | Wattage | CCT/<br>Wavelength** | Lumen Output |
|------------------|---------------|---------------|---------|----------------------|--------------|
| Low              | 9-16V         | 80 mA         | 1W      | 620 nm               | 30 lm        |
| High             | 9-16V         | 347 mA        | 4.6W    | 620 nm               | 128 lm       |
| Turn             | 9-16V         | 700 mA        | 9.4W    | 620 nm               | 250 lm       |

\*Current Draw @13.2v    \*\*+/-500 Tolerance

**Functions:** Low Red, High Red, and Turn Signal Red outputs

**Driver Type:** Type G High Priority Driver

**Connector Type:** 2 Pin JST and 4 Pin JST with T-Tap

**LED Type/Count:** 3014 Red LED/ 128 Total

**Operating Temperature:** -40°C to 85°C

**Length:** 9" **Width:** 5.75" **Height:** 2.25"

**Weight:** 1lbs



### What's Included:

- Two (2) LED halo rings
- Two (2) waterproof drivers
- Two (2) input wire pigtailed
- Eight (8) T-tap connectors
- Installation guide


*All data and specifications are nominal values and may vary.*

**PUBLISHED: 4-20-2020**

## COLORIMETRIC SPECIFICATIONS

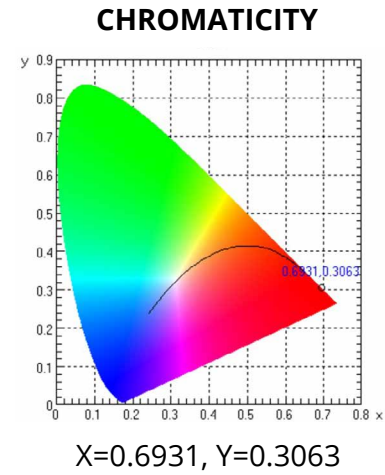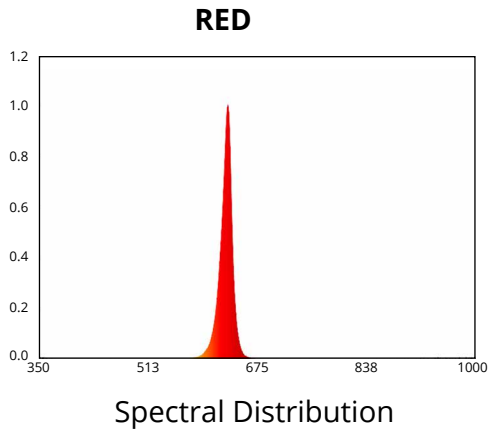

## PRODUCT DIMENSIONS

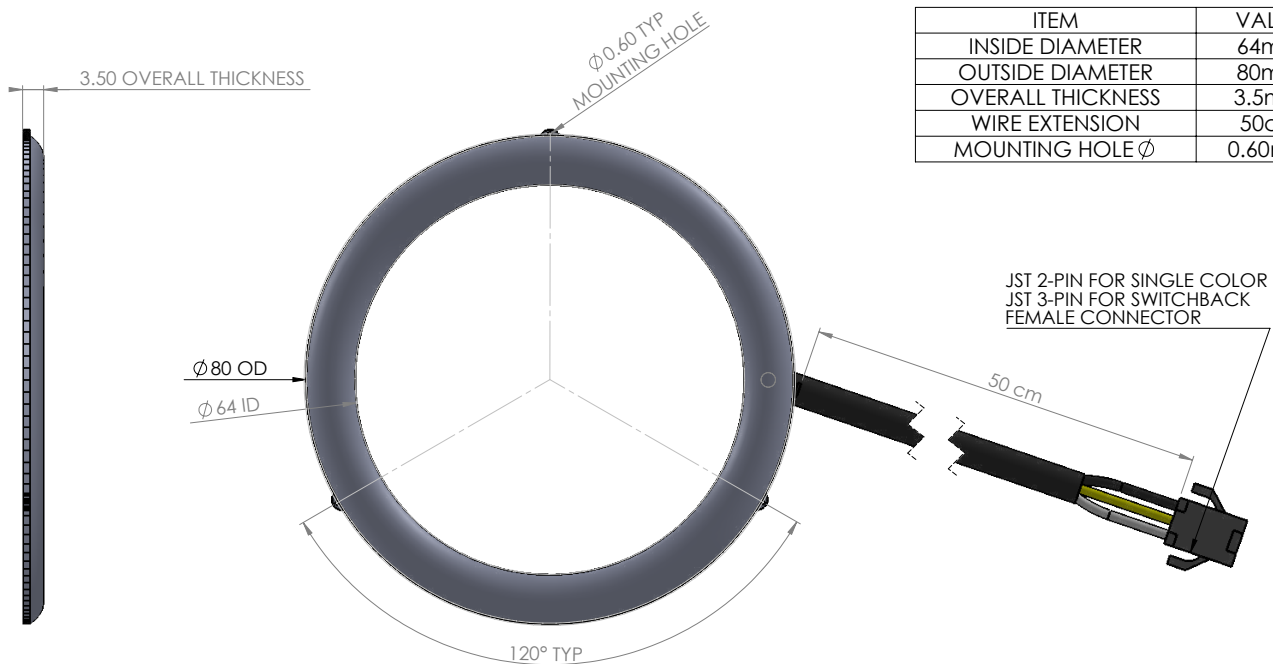

PUBLISHED: 4-20-2020