


9" Amber HD Strip

DD2122

DIODE DYNAMICS

PERFORMANCE LIGHTING TECHNOLOGY

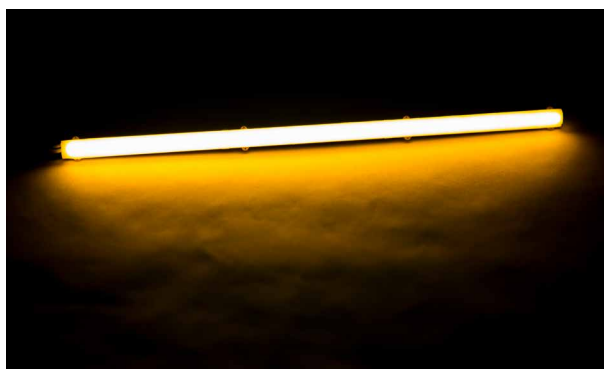

FEATURES

HDHALO™



- Proprietary durable phosphor coating, for uniform solid appearance
- Multi-function PWM drivers, fully waterproof, featuring low power, high power, and turn signal modes
- Extremely bright, high-density LEDs that are visible even in direct sunlight
- Integrated mounting tabs for easy installation

GENERAL SPECIFICATIONS

Product Function	Voltage Range	Current Draw*	Wattage	CCT/ Wavelength**	Lumen Output
Low	9-16V	110 mA	1.4W	1900K	85 lm
High	9-16V	430 mA	5.7W	1900K	350 lm
Turn	9-16V	875 mA	11.5W	1900K	665 lm

*Current Draw @13.2v **+/-500 Tolerance

Functions: Low Amber, High Amber, and Turn Signal Amber outputs

Driver Type: Type SG Single Color Low Priority Driver

Connector Type: 2 Pin JST and 4 Pin JST with T-Tap

LED Type/Count: 3014 Amber LED/ 126 Total

Operating Temperature: -40°C to 85°C

Length: 14.25" **Width:** 8.75" **Height:** 2.25"

Weight: 0.75lbs



What's Included:

- One (1) LED semi-flex strip
- One (1) waterproof driver
- One (1) input wire pigtail
- Four (4) T-tap connectors
- Installation guide

All data and specifications are nominal values and may vary.


PUBLISHED: 4-22-2020

COLORIMETRIC SPECIFICATIONS

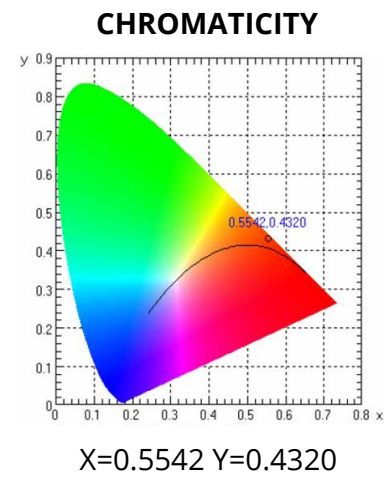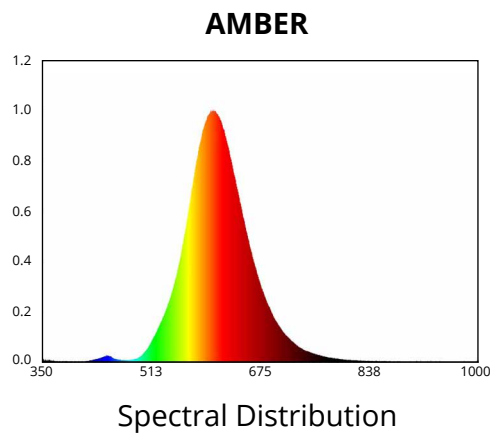

PRODUCT DIMENSIONS

ITEM	VALUE
Length	229mm (9 inch)
Width	8 mm (0.32 inch)
Thickness	2.8 mm (0.11 inch)
Wire Extension	50 cm (1.97 inch)
Mounting Hole ϕ	0.60mm (0.02 inch)

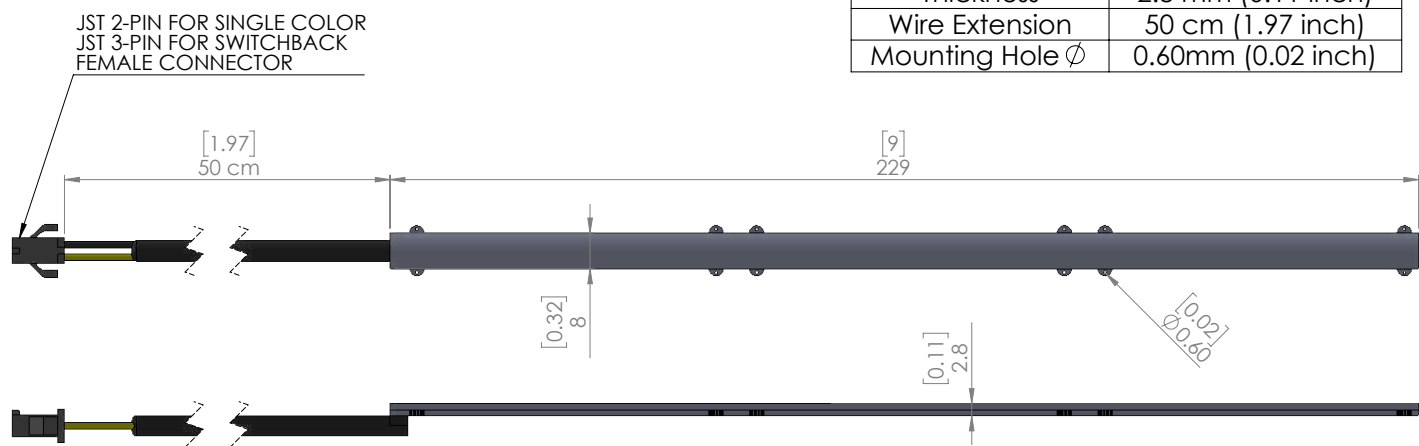

PUBLISHED: 4-22-2020