

## 3" White HD Strip

DD2132



### FEATURES

HD HALO™



- Proprietary durable phosphor coating, for uniform solid appearance
- Multi-function PWM drivers, fully waterproof, featuring low power, high power, and turn signal modes
- Extremely bright, high-density LEDs that are visible even in direct sunlight
- Integrated mounting tabs for easy installation

### GENERAL SPECIFICATIONS

Product Function	Voltage Range	Current Draw*	Wattage	CCT/ Wavelength**	Lumen Output
Low	9-16V	30 mA	390 mW	6500K	30 lm
High	9-16V	115 mA	1.5W	6500K	130 lm
Turn	9-16V	490 mA	6.5W	6500K	440 lm

\*Current Draw @13.2v    \*\*+/-500 Tolerance

**Functions:** Low White, High White, and Turn Signal White outputs

**Driver Type:** Type SB Single Color Low Priority Driver

**Connector Type:** 2 Pin JST and 4 Pin JST with T-Tap

**LED Type/Count:** 3014 Amber LED/ 42 Total

**Operating Temperature:** -40°C to 85°C

**Length:** 9" **Width:** 5.75" **Height:** 2.25"

**Weight:** 0.5lbs



#### What's Included:

- One (1) LED semi-flex strip
- One (1) waterproof driver
- One (1) input wire pigtail
- Four (4) T-tap connectors
- Installation guide


*All data and specifications are nominal values and may vary.*

**PUBLISHED: 4-22-2020**

COLORIMETRIC SPECIFICATIONS

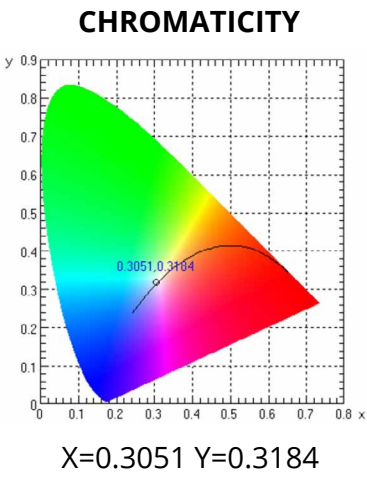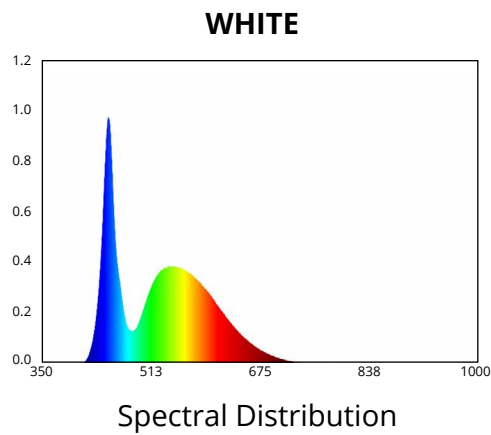

PRODUCT DIMENSIONS

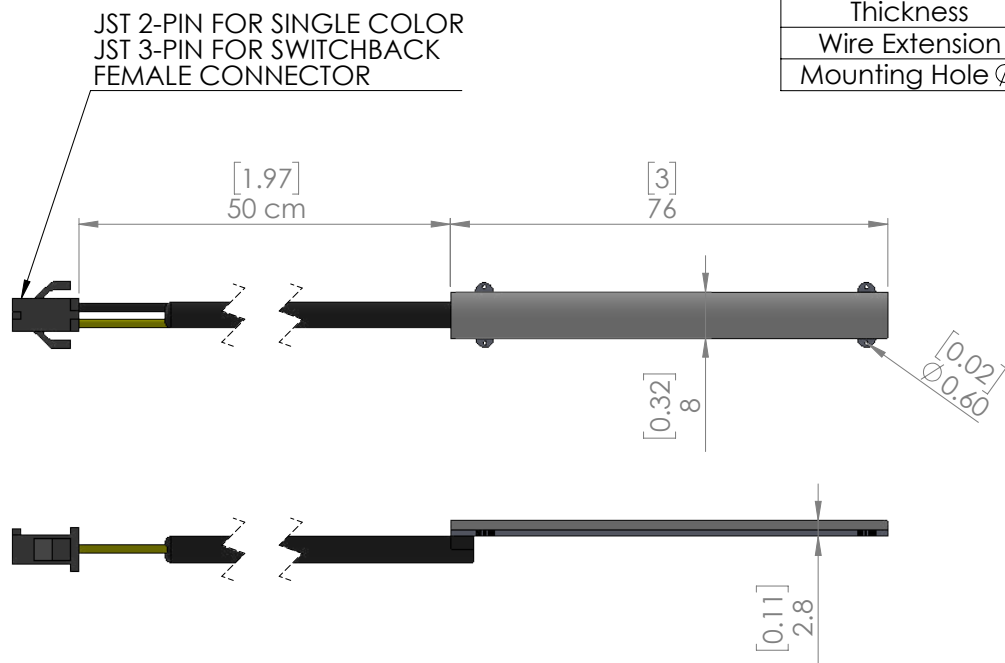

ITEM	VALUE
Length	76mm (3 inch)
Width	8 mm (0.32 inch)
Thickness	2.8 mm (0.11 inch)
Wire Extension	50 cm (1.97 inch)
Mounting Hole Ø	0.60mm (0.02 inch)

PUBLISHED: 4-22-2020