Stage Series 3" Sport Yellow Round LED Pod

DIODE DYNAMICS



FEATURES



- Advanced TIR optics provide high efficiency and focus
- High-intensity automotive-type LEDs
- Pin-fin heatsink design, for superior thermal dissipation
- Integrated Deutsch-style connector
- Durable powdercoated aluminum construction
- Designed, torture tested and assembled in USA

GENERAL SPECIFICATIONS

Optic	Peak Beam Intensity (Candela)	llluminance (lux @10m)	Measured Output (Lumens)	Raw Output (Lumens)	Output Color
Driving	53,500 cd	535 lux	1,300 lm	1,930 lm	Selective Yellow
Flood	1,600 cd	16 lux	1,300 lm	1,930 lm	Selective Yellow
Fog	9,050 cd	91 lux	1,300 lm	1,930 lm	Selective Yellow
Spot	149,000 cd	1,490 lux	1,300 lm	1,930 lm	Selective Yellow

Functions: Yellow Output Voltage Range: 9-16V Current Draw (amps @ 12.8V): 1.1A Wattage: 14.5W Connector Type: Deutsch DT Connector Driver Type: Integrated Driver LED Type/Count: Luxeon Z ES/4 total Compliance Rating: J575 Durability Test, SAE-F J583 Intrusion Rating: IP69K Waterproof, High Pressure Operating Temperature: -40°C to 85°C

What's Included:

- One (1) or Two (2) Stage Series 3" LED Pods
- One (1) or Two (2) Deutsch-style wire pigtails
- One (1) or Two (2) Mounting brackets and hardware

Dimensions & Weight:

Length: 14.5" Width: 10" Height: 5" Weight: 2.5 lbs (single), 3.5 lbs (pair)

SKUs: Append "S" to the end of each SKU for single and "P" for pair

DD6140 Stage Series 3" Sport Yellow Driving Round **DD6141** Stage Series 3" Sport Yellow Flood Round

DD6142 Stage Series 3" Sport Yellow Fog Round DD6143 Stage Series 3" Sport Yellow Spot Round


All data and specifications are nominal values and may vary.


PUBLISHED: 2-24-2021




DIODE DYNAMICS

COLORIMETRIC SPECIFICATIONS






PRODUCT DIMENSIONS

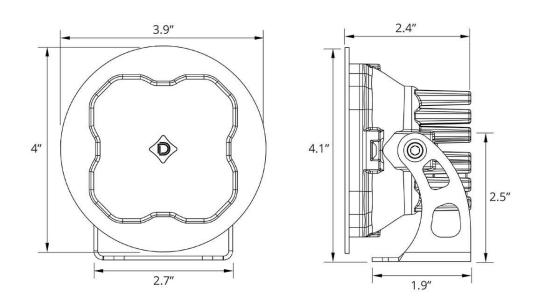


PUBLISHED: 2-24-2021

DIODE DYNAMICS

PHOTOMETRIC SPECIFICATIONS

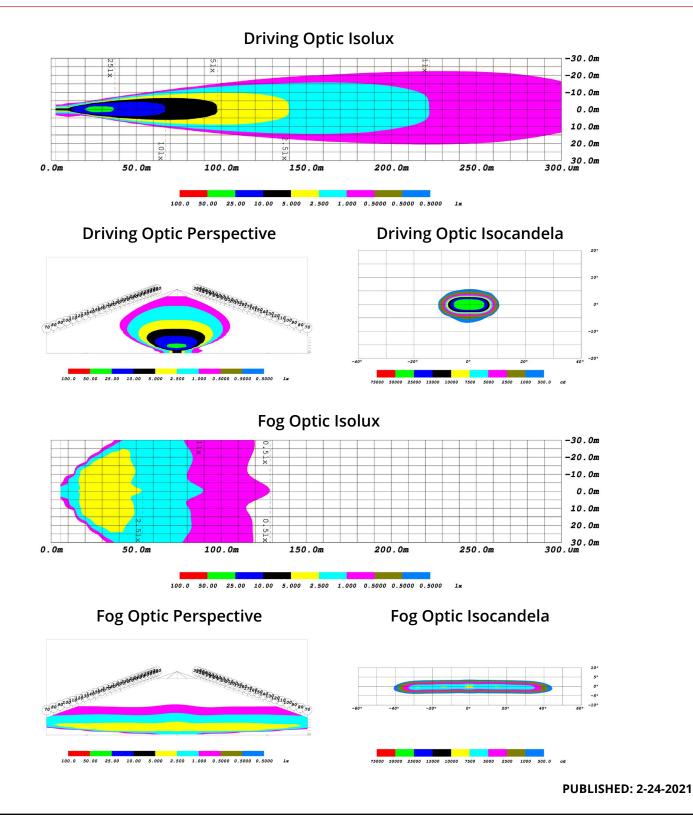

PHOTOMETRIC SPECIFICATIONS (cont.)

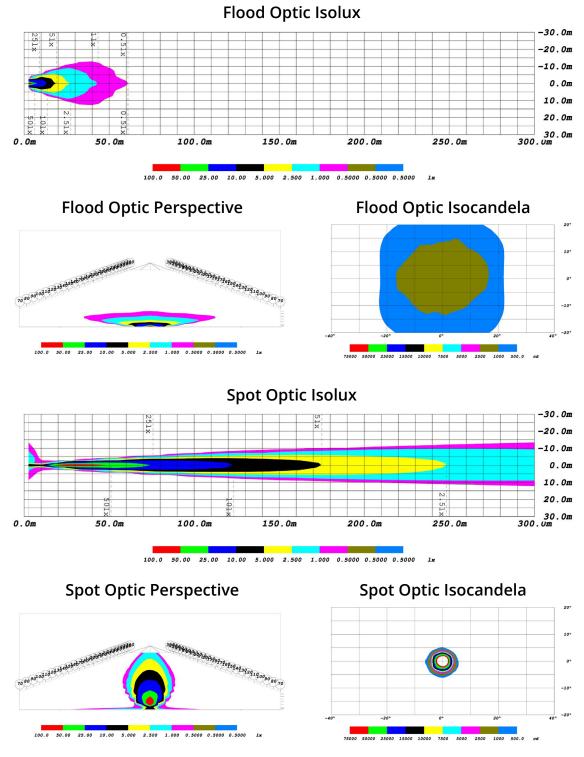

PUBLISHED: 2-24-2021