

DIODE DYNAMICS  
2014+ Toyota Tundra  
Driving Light Kit Installation Guide

PP0060B



9. Test to confirm the light bars are turning on. Aim your light bars. Please check your local laws and regulations for aiming, installation, and applicability.

Replace the grille using the original hardware to complete the installation.

Please contact **Diode Dynamics** should you have any questions about the installation or wiring process, at **314-205-3033** (10a-5p CST) or **contact@diodedynamics.com**.

**NEED MORE HELP?**

Scan the QR code to link to our installation video online!

We've taken the time to test our products on your vehicle. We can guarantee compatibility and fitment the first time - no guessing game! If you need more help with installation, watch our step-by-step video to walk you through the process.

YouTube



**This installation guide is for the following SKUs:**

**DD6064** Tundra SS12 Driving Light Kit White Driving  
**DD6065** Tundra SS12 Driving Light Kit White Wide  
**DD6066** Tundra SS12 Driving Light Kit White Flood

**DD6067** Tundra SS12 Driving Light Kit Amber Driving  
**DD6068** Tundra SS12 Driving Light Kit Amber Wide  
**DD6069** Tundra SS12 Driving Light Kit Amber Flood

100% SATISFACTION  
GUARANTEE

3 YEAR  
WARRANTY



DIODE DYNAMICS  
PERFORMANCE LIGHTING TECHNOLOGY

2014+ Toyota Tundra  
Driving Light Kit Installation Guide



# DIODE DYNAMICS

2014+ Toyota Tundra

## Driving Light Kit Installation Guide

Thank you for your purchase of this custom-designed LED light bar kit for your 2014+ Toyota Tundra! This kit utilizes both factory and included hardware to mount the bracket to the vehicle.

**3 YEAR  
WARRANTY**

**Tools Needed:** 10mm socket, flat head screwdriver or plastic trim tool



**WATCH THE INSTALLATION VIDEO ONLINE!**

Scan the QR code on page 3




1. Using a 10mm socket wrench and plastic trim removal tool, remove the four 10mm bolts and two plastic rivets located on the edge of the grille inside the engine bay.

Gently pull up and forward on the top of the grille to release it from the tabs holding the top portion in place.



2. Next, reach behind the headlight to a long pointed tab holding the bottom portion of the grille in place. Push down on the tab while pulling forward on the grille to release it. Repeat the same process for the other side of the truck and then set the grille aside on a soft surface.

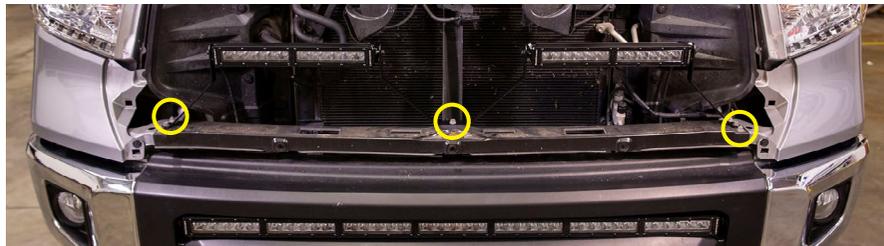

3. Locate and remove the 10mm bolt in the center and two 10mm bolts on the sides. See image above. Using the factory mounting points, mount the brackets using the bolts that you just removed.

# DIODE DYNAMICS

2014+ Toyota Tundra


## Driving Light Kit Installation Guide



4. Using the included hardware, attach your 12" Stage Series light bars to the brackets, only hand-tightening them.

### Wiring Instructions

The following instructions are for Toyota Tundras with an Auxiliary Switch Bank. If you do not have the Auxiliary Switch Bank, use the included toggle switch adapter wire to route a switch or use the included high beam adapter wire to connect to your factory high beams. All power sources must be fused.

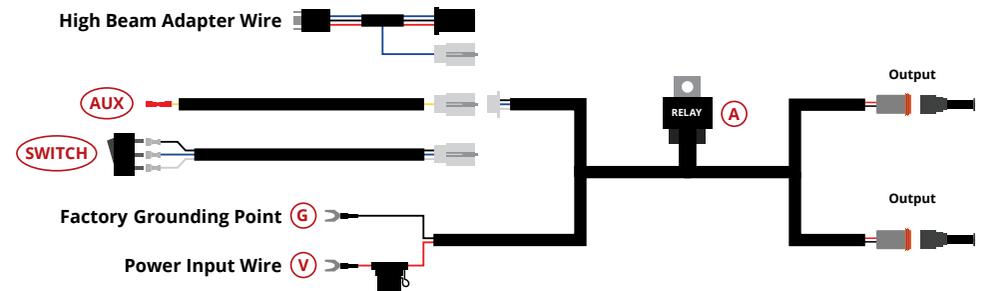

5. Determine a suitable location to mount the relay, (A) near the battery or main power terminal.

6. Connect the red power input wire (V) to the positive battery/power terminal. Connect the black ground wire to the negative battery terminal or a factory grounding point. (G)

7. At the white connector, unplug the switch wires from the harness, and connect the extra pigtail here instead. Using the butt connector at the end of the pigtail, crimp the yellow wire to an OEM Auxiliary Switch wire lead. (AUX)

**NOTE:** Power will be drawn from the battery, so any OEM Auxiliary Switch wires can be used, regardless of amperage rating.

8. Route the output wire(s) to the light bar(s), avoiding any moving parts or direct contact with heat sources. Plug the output connector(s) into the light bar(s).

*See back for further instructions.*