

Stage Series 3" Pro Yellow Flush Mount LED Pod



FEATURES

STAGE
SERIES



- Allows for flush installation on bumpers and truck beds
- Advanced TIR optics provide high efficiency and focus
- Pin-fin heatsink design, for superior thermal dissipation
- Integrated Deutsch-style connector
- Durable powdercoated aluminum construction
- Designed, torture tested and assembled in USA

GENERAL SPECIFICATIONS

Optic	Peak Beam Intensity (Candela)	Illuminance (lux @10m)	Measured Output (Lumens)	Raw Output (Lumens)	Output Color
Driving	60,900 cd	609 lux	2,700 lm	5,220 lm	Selective Yellow
Flood	2,850 cd	29 lux	2,700 lm	5,220 lm	Selective Yellow
Fog	10,900 cd	109 lux	2,700 lm	5,220 lm	Selective Yellow
Combo	33,406 cd	334 lux	2,700 lm	5,220 lm	Selective Yellow
Spot	118,500 cd	1,185 lux	2,700 lm	5,220 lm	Selective Yellow

Functions: Yellow Output

Voltage Range: 9-16V

Current Draw (amps @ 12.8V): 2.7A

Wattage: 36W

Connector Type: Deutsch DT Connector

Driver Type: Integrated Driver

LED Type/Count: Cree XP-L HI/4 total

Compliance Rating: J575 Durability Test, SAE-F J583

Intrusion Rating: IP69K Waterproof, High Pressure

Operating Temperature: -40°C to 85°C

What's Included:

- One (1) or Two (2) Stage Series 3" LED Pods
- One (1) or Two (2) Deutsch-style wire pigtails
- One (1) or Two (2) Flush Frame gaskets
- Mounting hardware and drilling template

Dimensions & Weight:

Length: 14.5" **Width:** 10" **Height:** 5"

Weight: 2.5 lbs (single), 3.5 lbs (pair)

SKUs: Append "S" to the end of each SKU for single and "P" for pair

DD6212 Stage Series 3" Pro Yellow Driving Flush
DD6213 Stage Series 3" Pro Yellow Flood Flush



DD6214 Stage Series 3" Pro Yellow Fog Flush
DD6215 Stage Series 3" Pro Yellow Spot Flush

DD6721 Stage Series 3" Pro Yellow Combo Flush



All data and specifications are nominal values and may vary.

PUBLISHED: 2-24-2021

COLORIMETRIC SPECIFICATIONS

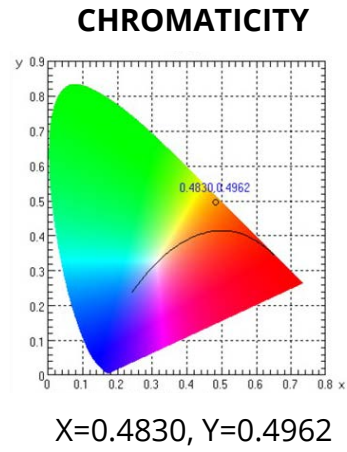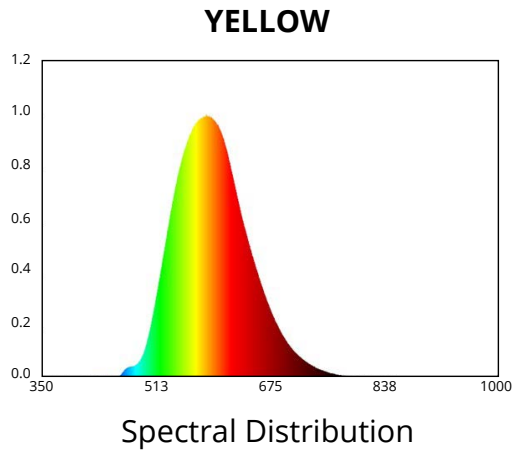


PRODUCT DIMENSIONS

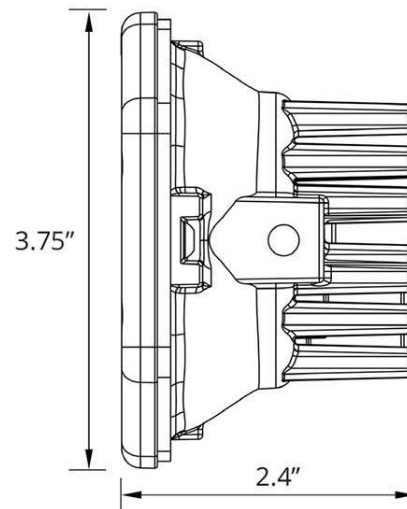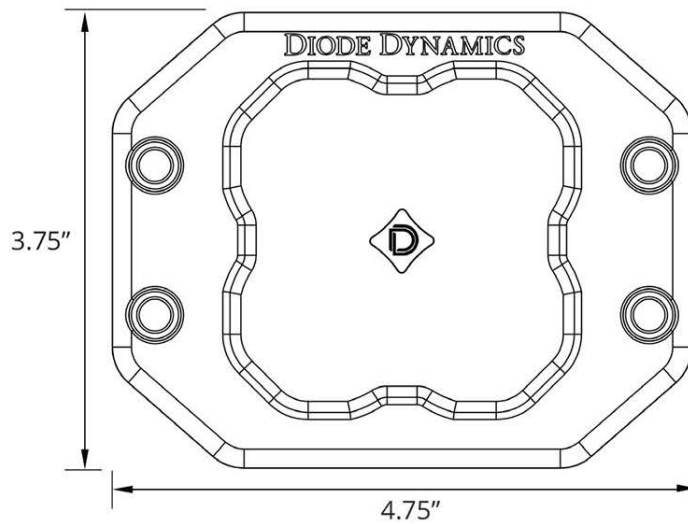


PUBLISHED: 2-24-2021

PHOTOMETRIC SPECIFICATIONS


Driving Optic Isolux

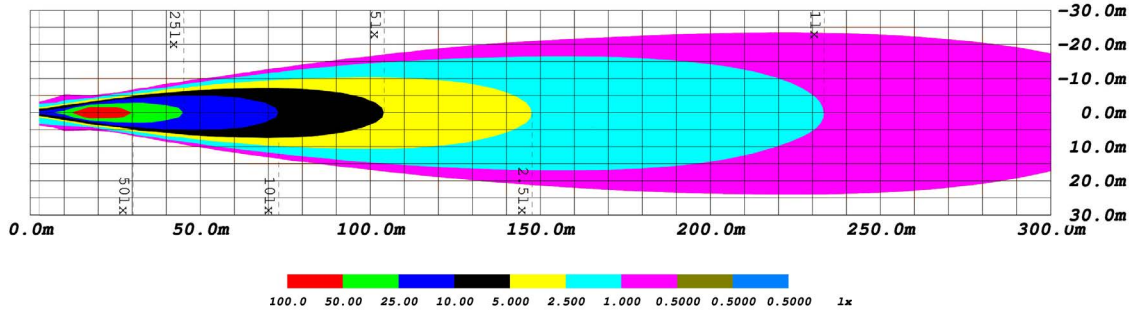


Driving Optic Perspective

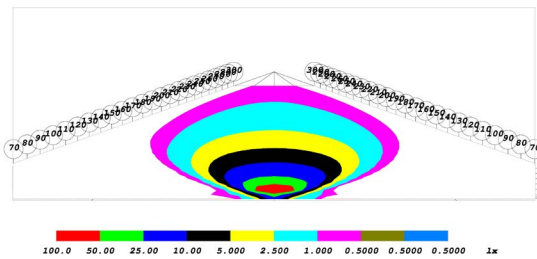


Driving Optic Isocandela

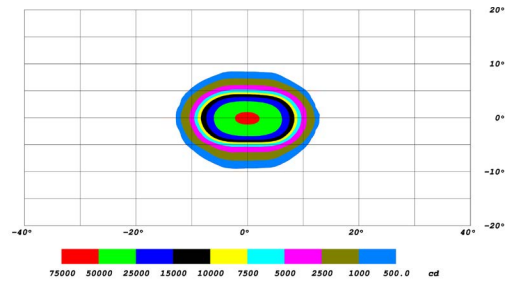


Fog Optic Isolux

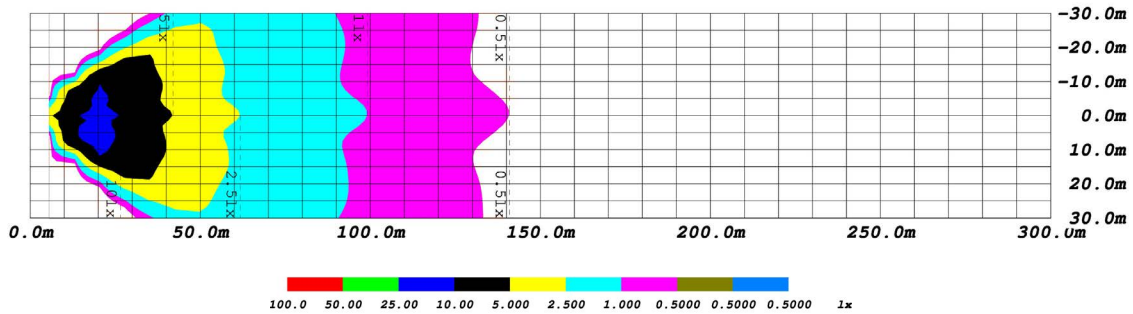

Fog Optic Perspective

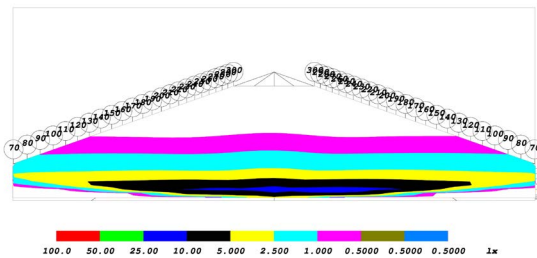


Fog Optic Isocandela

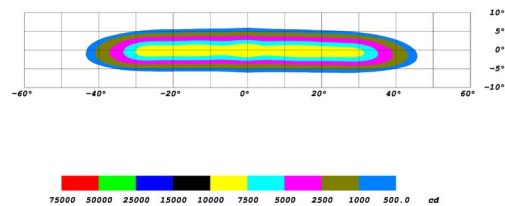


PUBLISHED: 2-24-2021

PHOTOMETRIC SPECIFICATIONS (cont.)


Combo Optic Isolux

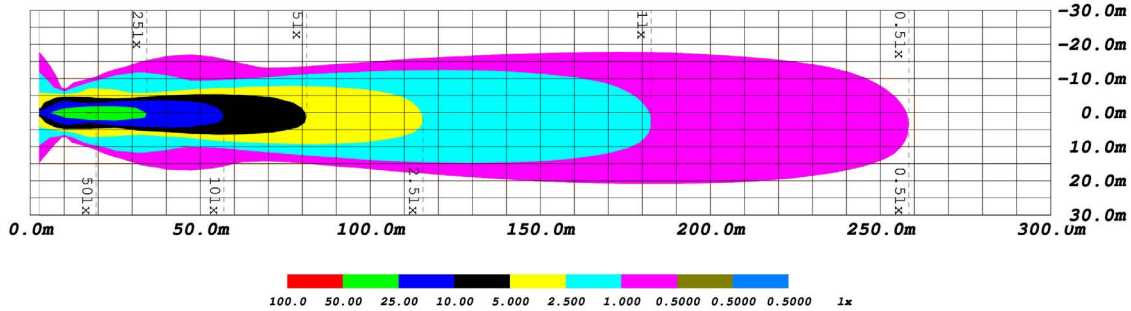


Combo Optic Perspective

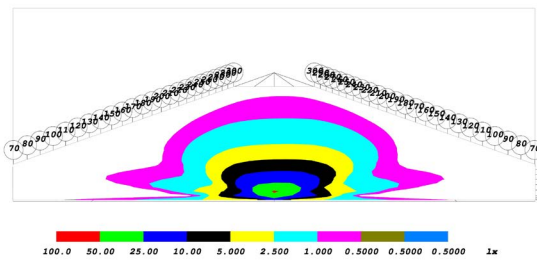


Combo Optic Isocandela

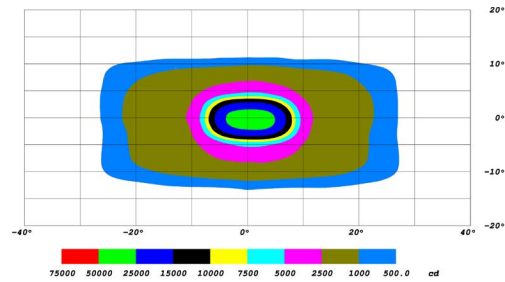


Flood Optic Isolux

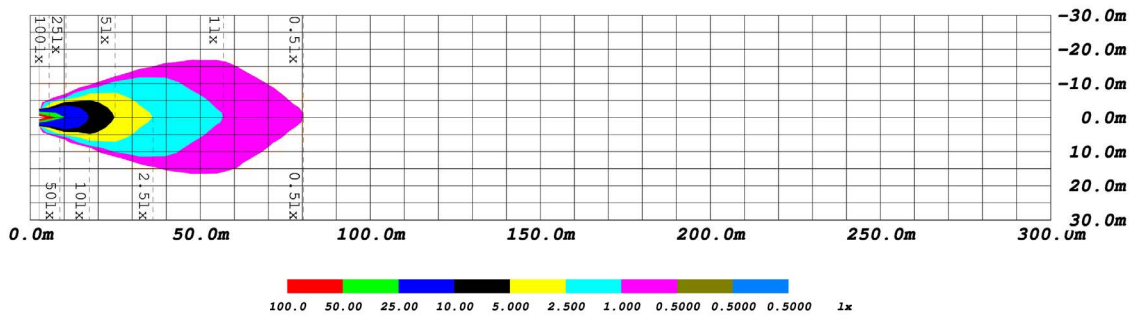

Flood Optic Perspective

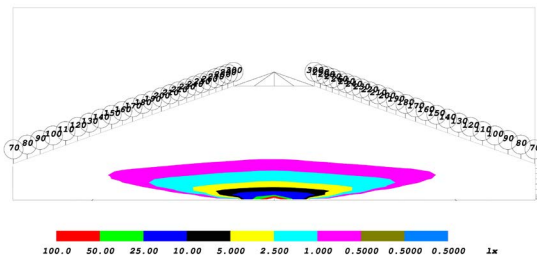


Flood Optic Isocandela

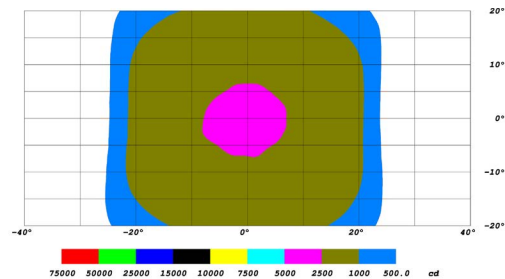


PUBLISHED: 2-24-2021

PHOTOMETRIC SPECIFICATIONS (cont.)

Spot Optic Isolux

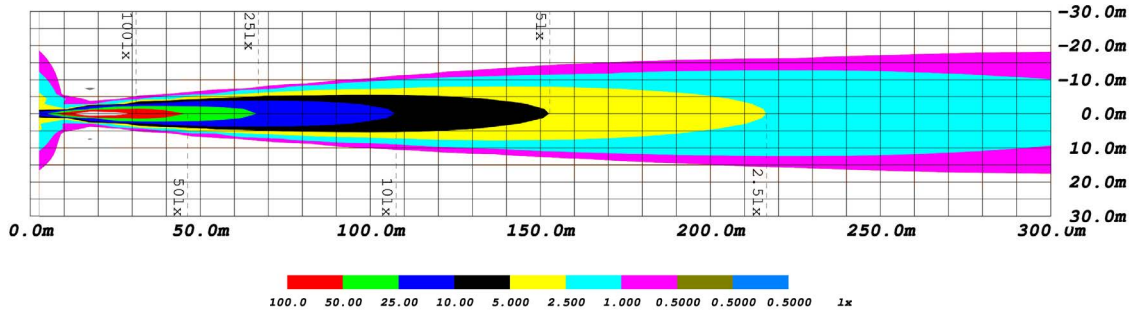

Spot Optic Perspective

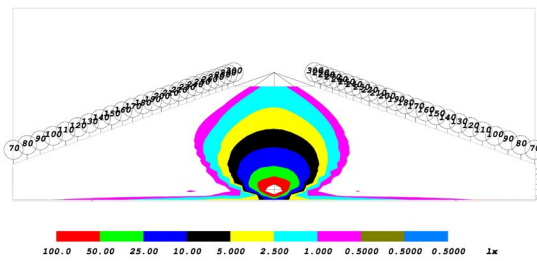

Spot Optic Isocandela

