


Wiring Instructions

6. First, connect the LED board to the driver. Then connect the driver to the pigtail. Connect the pigtail to 12V power and ground. This will dictate when the panels turn on. The most popular wiring choice is listed in the table below. **The black wire must be grounded before any function will work.**

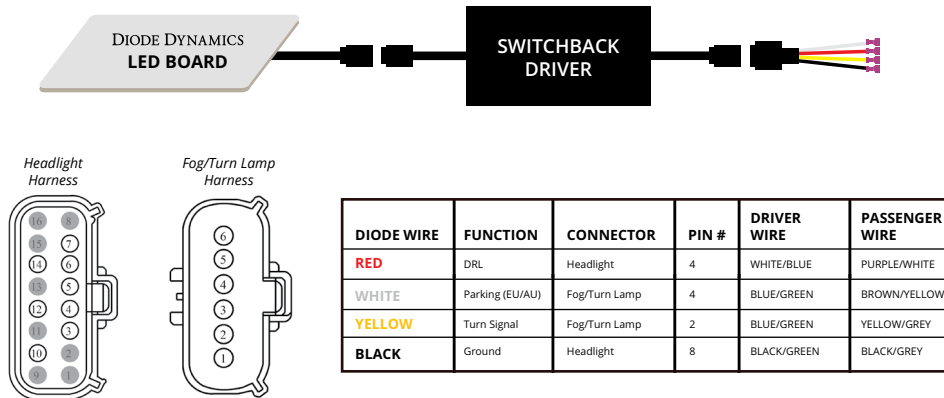

IMPORTANT: DO NOT plug the LED panel directly into pigtail without the driver. The LEDs must be plugged into driver first to control the power.

7. Mount driver and tuck all wires. **Driver should be mounted outside of headlight for serviceability, in a location away from the engine block to avoid excessive heat buildup.**

8. Test thoroughly and reinstall onto vehicle.

NEED MORE HELP?

Scan the QR code to link to our installation video online!

By taking the time to test our products on every vehicle make and model, we can guarantee compatibility and fitment the first time – no guessing game! Our step by step videos walk you through the process, making installation a breeze for the everyday automotive enthusiast!

YouTube



This installation guide is for the following SKU:


DD2281 Mustang 2018 Switchback LED Boards EU

Please contact **Diode Dynamics** should you have any questions about the installation or wiring process, at **314-205-3033** (10a-5p CST) or **contact@diodedynamics.com**.

DIODE DYNAMICS

PERFORMANCE LIGHTING TECHNOLOGY

2018+ Ford Mustang (EU/AU) Pro Series Switchback LED Board Installation Guide

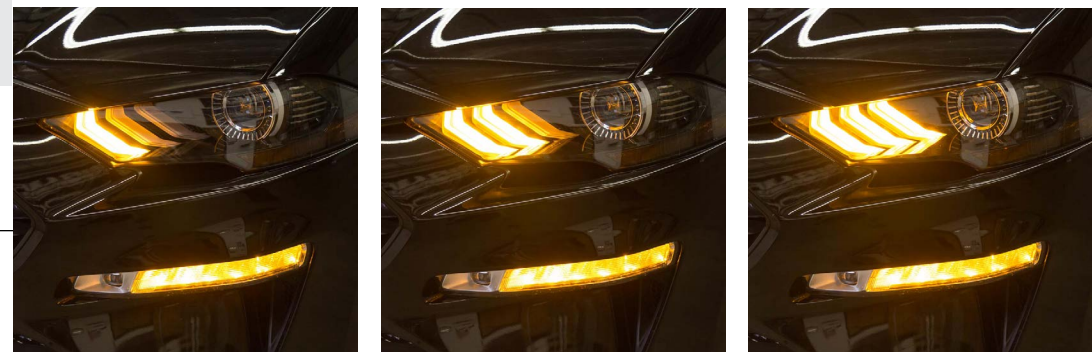

DIODE DYNAMICS

2018+ Ford Mustang (EU/AU) Pro Series Switchback LED Board Installation Guide

Thank you for your purchase of this unique product for your Ford Mustang!
With these LED boards, you will be able to add a sequential amber turn signal to
your factory LED DRL bars inside the headlight.




Please note: Headlights must be opened before proceeding with installation.
Professional installation is strongly recommended. Please contact Diode Dynamics
if you need assistance locating an installer.

Tools Needed: Cutting pliers, 5-minute Epoxy, and Phillips Screwdriver



1. Open the headlight housing. To do so, remove the four screws holding the back of the headlight housing to the lens. Set the lens aside on a soft surface to avoid scratching or marring the surface.

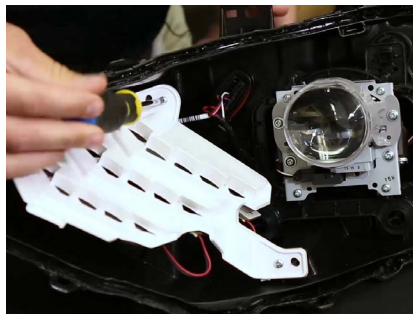


2. Remove the three Phillips screws holding the white DRL bezel in place. Once the screws have been removed, pull the bezel away from the headlight housing.



[WATCH THE INSTALLATION VIDEO ONLINE!](#)

Scan the QR code on page 3

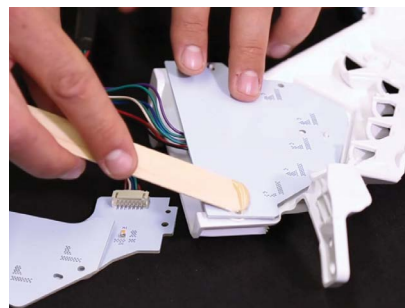

3. Place your new Diode Dynamics LED boards into position. All holes should align perfectly. Secure the new boards in place by applying epoxy or other permanent adhesive where the plastic rivets were removed. The epoxy should create a bond between the plastic rivet mounting point and the board. Use enough epoxy so that there is a bond all the way around the rivet, contacting the board fully. We recommend securing the board labeled 3 first and working your way forward.



4. Once the epoxy is fully set, reinstall the white bezel to the main headlight housing using the original screws.



5. Run the wiring out of headlight, sealing any holes that you may create.

See back for further instructions.